


■ DESCRIPTION

The DM-520 AS is a multi-purpose microphone featuring high intelligibility, suitable for vocal application.

■ SPECIFICATION

|                    |  |
|--------------------|--|
| Type               | Moving coil microphone   |
| Directivity        | Unidirectional   |
| Rated Impedance    | 600 ohms, balanced   |
| Rated Sensitivity  | -55 dB (1kHz, 0dB = 1 V/Pa)  |
| Frequency Response | 80 Hz - 13 kHz   |
| Connection Cable   | Separate type  |
| Cable length       | 7.5 m  |
| Connector          | XLR-3 type   |
| Talk Switch        | Short-off, slide switch  |
| Finish             | Body : Die-cast aluminium, dark grey<br>Head : Die-cast aluminum/zinc-plated steel wire, dark grey |
| Dimensions         | ∅50 X 176 mm (microphone body)   |
| Weight             | 232 g (without connection cable)   |
| Accessories        | Microphone holder (W 5/16" 18 thread)  |

■ APPEARANCE

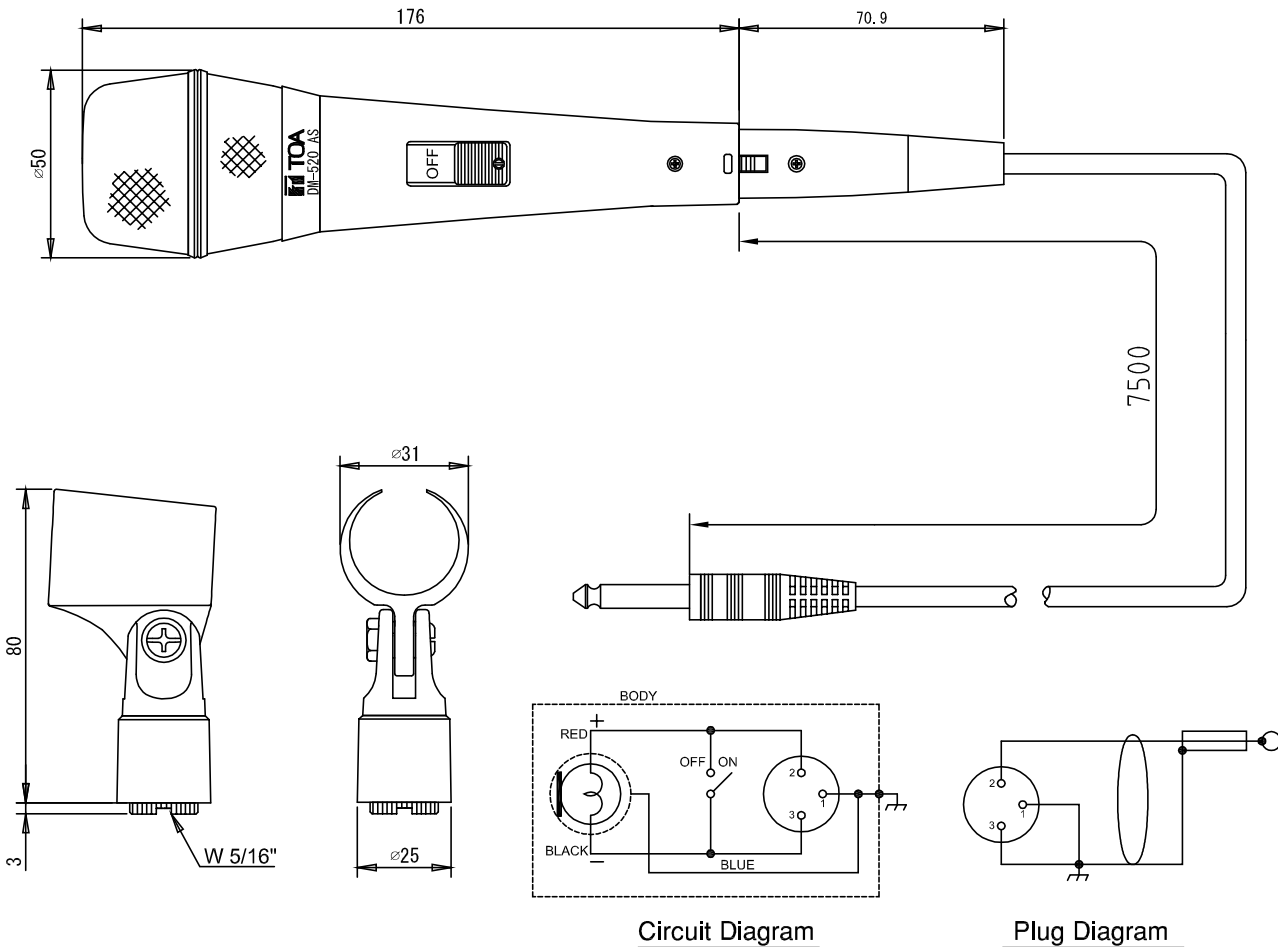

UNIT: mm SCALE: 1/2