

■DESCRIPTION

The FV-200EV-AS Emergency Message Panel is the emergency broadcast operating section of the FV-200 Series Emergency Public Address System. It need not be installed when the system is used solely for general purpose broadcast purposes. It has facilities for manually starting and resetting emergency broadcasts. Emergency announcements are recorded in English (default settings), which can be changed by USB data transfer operations from rear panel.


■SPECIFICATIONS

* 0 dB = 1 V


| | |
|----------------------------|---|
| Power Source | Usable power supply unit : FS-7000PS 24 V DC (operating range : 19.5 - 27 V), M3 screw terminal |
| Current Consumption | 250 mA |
| Emergency Announcement | Alert (repeated continuously), Evacuation (repeated continuously), False (repeated continuously), and Clear (repeated continuously) |
| Emergency Warning Language | English (default) |
| Audio Input | Fireman's microphone : -55 dB*, 600 Ω, unbalanced, XLR-3P connector |
| Audio Output | EV : -20 dB*, unbalanced, Removable terminal block (2pins) |
| Control Input | FA Input : No-voltage make contact input, Open voltage : 24 V DC, Short-circuit current : Under 5 mA, Removable terminal block (2pins) |
| Control Output | Control output : Relay contact output x 4, rated voltage : 24 V DC, Removable terminal block (2pins) |
| Frequency Response | 20 Hz - 20 kHz, ±3 dB, 1 kHz |
| Distortion | Under 1% (1 kHz, rated output) |
| Wave Format | 44.1 kHz sampling frequency, 16 bit PCM (monaural) |
| Recording System | USB data transfer from rear panel |
| Maximum Recording Time | 6 minutes (use built in memory) |
| Operation | Alert announcement button, Evacuation announcement button, False announcement button, Clear announcement button, Stop announcement button |
| LED Indicator | Power (Green), Fire (Red), Alert announcement (Green), Evacuation announcement (Green), False announcement (Green), Clear announcement (Green), USB (Green) |
| Operating Temperature | 0°C to +40°C |
| Operating Humidity | Under 90% RH (no condensation) |
| Finish | Front Panel : Aluminum, black, alumite |
| Dimensions | 482 (W) X 100 (H) X 396.7 (D) in mm |
| Weight | 4.3 kg (with Microphone) |
| Accessory | Removable terminal plug (2pins)...7, Fireman's Microphone...1, Instruction Manual...1 |

■ APPEARANCE

Rear View

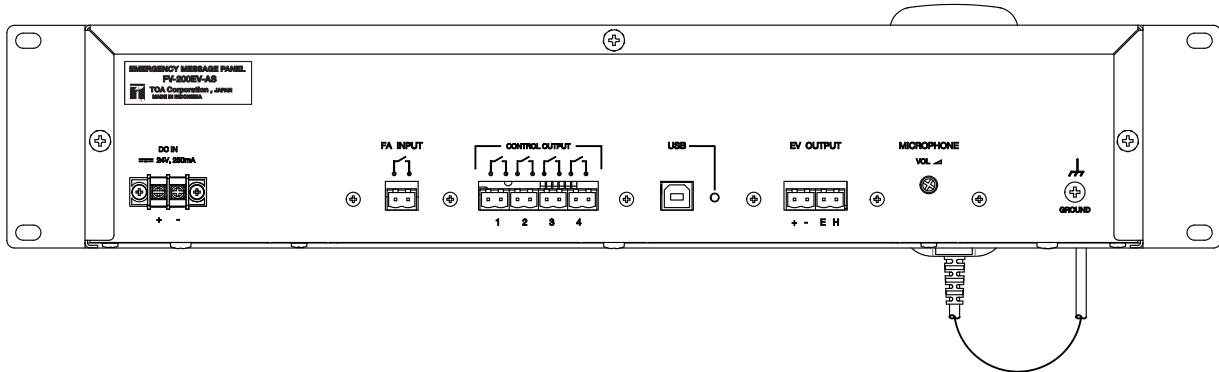

Front View

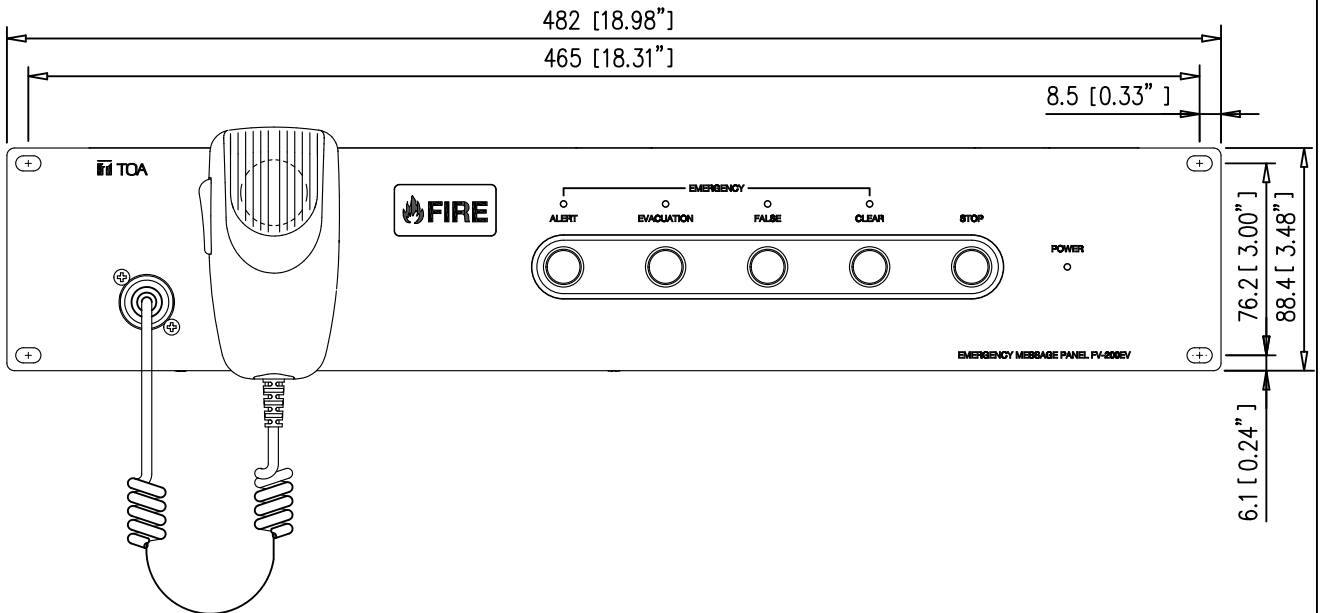

Right View

