


■DESCRIPTION

The PM-222U is a close-talking microphone for making general announcements. It comes with a talk switch that can be locked. It is provided with the function to remotely control both the amplifier power and chime operation.

■SPECIFICATIONS

Type	Moving coil microphone
Directivity	Unidirectional
Rated Impedance	600 Ω, balanced
Rated Sensitivity	-47 dB (1 kHz 0 dB = 1 V/Pa)
Frequency Response	100 Hz - 10 kHz
Cable	2-core shielded plus 2-core cable
Cable Length	2 m (when extended)
Terminal	No connector
Talk Switch	Short-off type with lock
Remote Switch	Make contact (linked with talk switch) 30 V DC, 500 mA or less
Finish	ABS resin, gray
Dimensions	44 (W) × 160 (H) × 38 (D) mm
Weight	200 g
Accessory	Microphone holder.....1, Metal fitting.....1, Tapping screw4X16.....2

■APPEARANCE

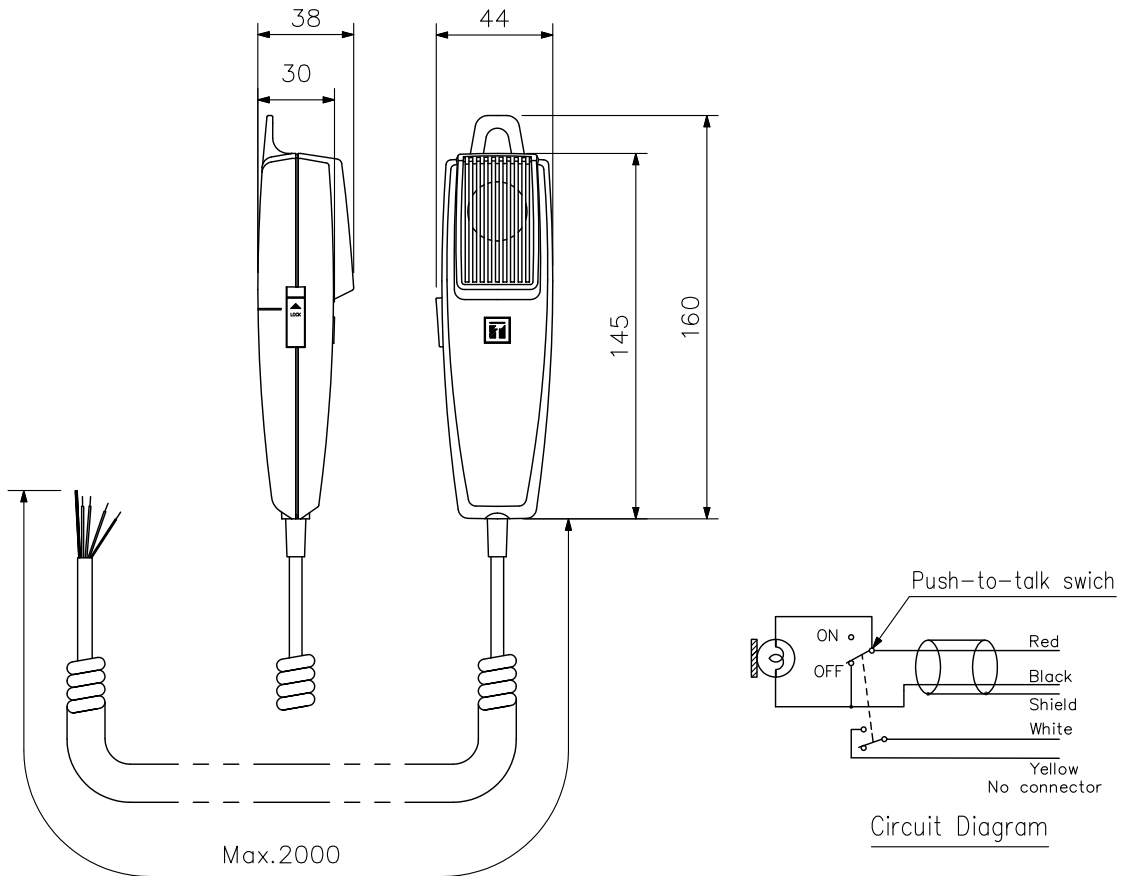

UNIT:mm SCALE:1/3