


## DESCRIPTION

The SR-S4S is a two-way line array speaker ideal for short distance sound transmission and configures a line array by arranging speaker elements vertically close to each other. It can be converted into the bi-amplifier drive system by changing the internal connection. It can be used for high-impedance applications with the installation of the optional MT-S0601 Matching transformer.

## SPECIFICATIONS

|                         |   |
|-------------------------|---|
| Enclosure               | Bass-reflex type  |
| Power Handling Capacity | Continuous program: 600 W (single-amp mode)<br>Low 240 W, High 240 W (bi-amp mode)  |
| Rated Impedance         | 8 Ω (single-amp mode)<br>Low 8 Ω, High 8 Ω (bi-amp mode)  |
| Sensitivity             | 93 dB (1 W, 1 m)  |
| Frequency Response      | 70 Hz - 20 kHz (when recommended parameters are applied by the optional DP-SP3)   |
| Crossover Frequency     | 3.5 kHz   |
| Directivity Angle       | Horizontal: 90°, Vertical: 10°  |
| Speaker Component       | Low frequency: 10 cm cone-type × 8<br>High frequency: 2.5 cm balanced dome-type × 24  |
| Input Connector         | M4 screw terminal, distance between barriers: 10 mm and Neutrik NL4MPXX × 2   |
| Finish                  | Enclosure: MDF, white, paint<br>Front grille: Punched steel plate, white, acrylic paint   |
| Dimensions              | 160 (W) × 892 (H) × 303 (D) mm  |
| Weight                  | 16 kg   |
| Accessory               | Bi-amplifier drive rating label ∙1, Bi-amplifier drive input indication label ∙1  |
| Option                  | Matching transformer: MT-S0601, Extension plate: SR-EP4,<br>Flying bracket: SR-FB4, Wall tilt bracket: SR-TB4,<br>Stand adapter: SR-SA4, Protection pad: SR-PP4,<br>Digital speaker processor: DP-SP3 |

## APPEARANCE

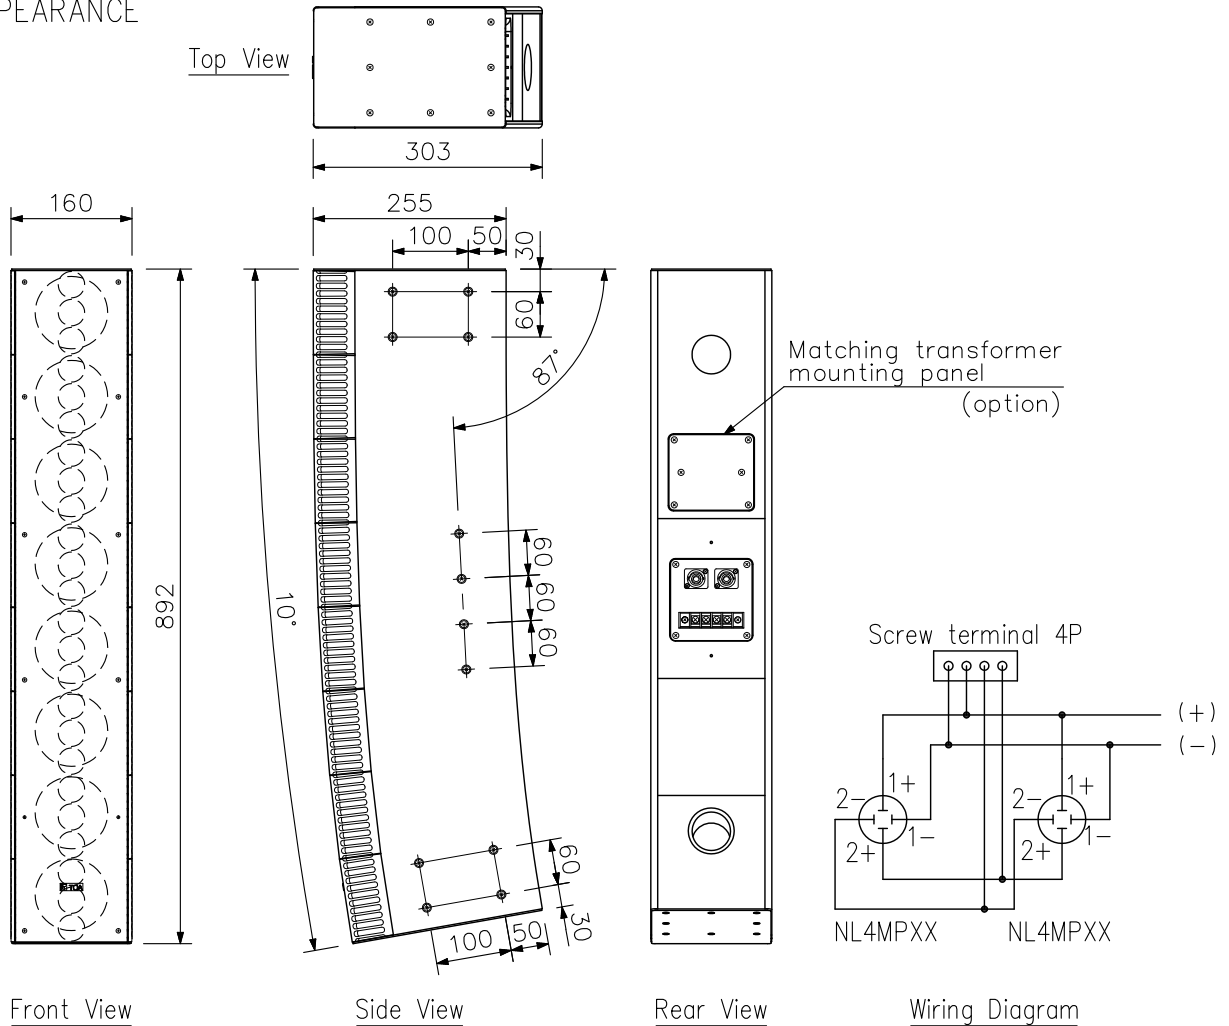

UNIT: mm SCALE: 1/10