



NF-2

Window Intercom System

(Two-way Talk Enhancement System)



Ensure your voice is clearly heard through the counter shield



With NF-2, there is no need to speak loudly through the counter shield anymore!



Receptions



Hospitalities



Retail Stores



Compact & Lightweight

The communication station can be installed in small spaces which is out of reach to other bulky or heavy communication equipment.

Instant Installation

Simple wiring and mounting process makes it suitable for even temporarily booth setups and/or relocations.

A magnet is pre-mounted on the backside of the station for tool-free quick installation back to back. The optional magnetic plates with a double-sided tape are also included for more flexible installation



My voice




can be heard clearly



Sophisticated Audio Control

Boosting higher frequencies to compensate intelligibility lost with the use of partitions. Higher frequencies also ensures lesser sound spread

Higher frequencies are remarkably decreased with the use of face mask and partition

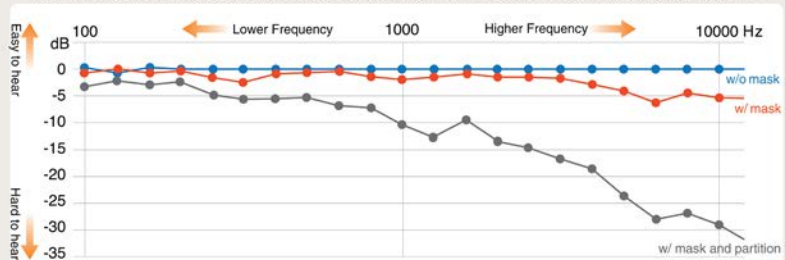

Product Information

Mic/Speaker Unit:

Dimensions (WxHxD) : 60 x 60 x 20 mm
 Weight : Approximately 50g (per unit)
 Mounting method : Magnet mount

Control Unit:

Dimensions (WxHxD) : 127 x 30 x 141 mm
 Weight : Approximately 225g
 Power Source : 9V DC (optional AD-0910)

Optional Accessory : Extension Cable 5m (YR-NF5)



TOA Electronics Pte Ltd
www.toa.com.sg

facebook.com/TOAasiapacific

Specifications are subject to change without notice.
 Printed in Singapore (65) 865-1221-02B