



BATTERY CHARGER

IR-200BC
(CE/CE-AU/CE-GB/CN/KR/US)

DESCRIPTION

The IR-200BC is a dedicated battery charger for the IR-200M and IR-300M Infrared Wireless Microphones. It employs a quick charging system for nickel metal hydride (Ni-MH) batteries, allowing up to 2 infrared wireless microphones to be fully charged within 3 hours.

SPECIFICATIONS


Power Source	AC mains, 50/60 Hz (supplied from the included AC adapter (*1))
Power Consumption	Max. 2 A
Charging Time	Max. 3 h
Number of Wireless Microphones to be Charged Simultaneously	2 pieces (*2)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	30 % to 85 %RH (no condensation)
Finish	Case: ABS resin, metallic gray, paint, 50 % gloss Microphone receptacle section: PPE resin, black
Dimensions	238 (W) × 109.5 (H) × 98 (D) mm (9.37" × 4.31" × 3.86")
Weight	635 g (1.4 lb) (unit only, including mounting adapter (accessory))
Accessory	Mounting adapter (preinstalled on the unit) ...2, AC adapter (DC cord length: 1.2 m (3.94 ft))(*1) ...1, Power cord (2 m (6.56 ft))(*1) ...1
Option	Ni-MH battery: IR-210BT-2 (containing 2 pieces), IR-200BT-2 (containing 2 pieces)

(*1) Not supplied with the IR-200BC(KR). For the usable power supply cord and AC adapter, contact your nearest TOA dealer.

(*2) Using the mounting adapter allows one each of the IR-200M and IR-300M to be charged in combination.

Note: that nickel metal hydride (Ni-MH) batteries other than the dedicated battery IR-210BT/IR-200BT cannot be charged.


APPEARANCE

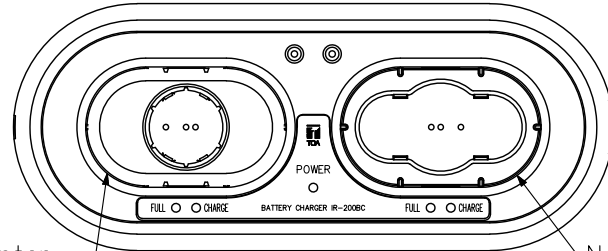


Installed mounting adapter
(when charging the IR-200M)

Top View


No mounting adapter installed
(when charging the IR-300M)



Left Side View

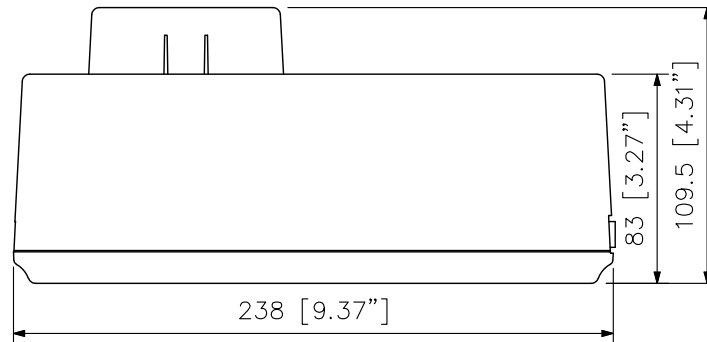

Front View



Right Side View

Version	CE	CE-AU	CE-GB	CN	US
AC plug					

Note: The figure above shows the IR-200BC with one of the mounting adapters removed.

UNIT:mm SCALE:1/3